

## AXIS Pendant Dome

Protect your Axis PTZ and PTZ dome network cameras



- > IP66-rated protection
- > Indoor and outdoor installation
- > Operating temperature down to -40 °C (-40 °F)
- > Several mounting options

AXIS Pendant Dome provides Axis PTZ and PTZ dome network cameras with IP66-rated protection from dust and water. With its discreet design, the housing is well suited for installation in various spaces, such as parks, parking lots and malls.

With fan-assisted heating, the housing enables the camera to operate in temperatures down to -40 °C (-40 °F), making it suitable for outdoor environments as well as indoor conditions that may be humid, cold or dusty.

The AXIS Pendant Dome ships with a clear dome bubble that can be replaced with a smoked version.

The housing provides an internal protective passage for cables. A variety of brackets makes it easy to install, for example on ceilings and walls.

Compatibility with AXIS 214 PTZ Network Camera.




## Technical Specifications – AXIS Pendant Dome

<b>Models</b>	AXIS Pendant Dome
<b>General</b>	
<b>Supported cameras</b>	AXIS 214 PTZ
<b>Casing</b>	Durable plastic, UV Protected, Distortion free, Polycarbonate dome bubble
<b>Power</b>	Input: 110-120 60 Hz V AC max: 0.4 A Output: max: 40 V AC 24 V AC 1.6 A


<b>Environment</b>	Indoor/outdoor
<b>Operating conditions</b>	AXIS 214 PTZ: -40 °C to 38 °C (-40 °F to 100 °F) Fan-assisted heater: On: 4 °C (40 °F) Off: 15 °C (60 °F)
<b>Approvals</b>	All included electrical components are UL approved, IP66
<b>Dimensions</b>	Height: 340 mm (13.4 in), Ø 261 mm (10.3 in)
<b>Weight</b>	5.0 kg (11 lb)
<b>Optional accessories</b>	Smoked dome bubble, 24 V AC outdoor power supply

More information is available at [www.axis.com](http://www.axis.com)

### Dimensions

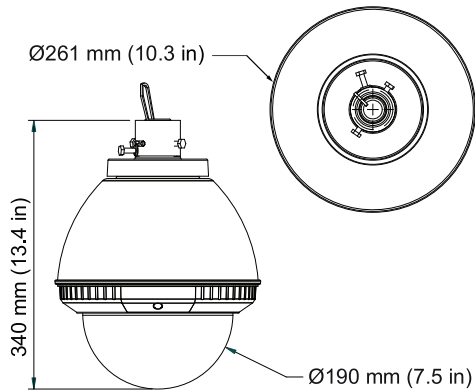

### Power supply: PB24

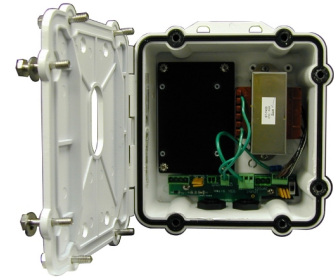

### Mounts and Mounting adapters

1. Gooseneck wall mount
2. Parapet mount
3. Corner mount
4. Pole mount

